
WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

Si) International Patent Classification 5: A61M 35/00	A1	(11) International Publication Number: WO 92/1931 (43) International Publication Date: 12 November 1992 (12.11.9)
22) International Application Number: PCT/U 23) International Filing Date: 28 April 1992 34) Priority data: 28 April 1992 45) Priority data: 3 May 1991 (03.05.91) 47) Applicant: MEDCHEM PRODUCTS, INC, IU West Cummings Park, Woburn, MA 01801 (12) 27) Inventors: FERDMAN, Ariel ; 12 Hillside Av rote, MA 02176 (US), RUO, Jing-Wen ; 12 Road, #367, Boxboro, MA 01719 (US), MILL § Francis Street, Brookline, MA 02146 (US) Vladmint ; 10 Lake Shore Terrace, Apt. #4 MA 02135 (US), RICHARDS, William, Dana liston Street, Medway, MA 02033 (US), SWA; § 295 Massachusetts Avenue, Unit 706, Camt 02139 (US).	S/US]; JS). enue, M 23 Spen ER, Da . PINSI ; 167 E	State Street, Bosion, MA 02109 (US). (81) Designated States: AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (European patent), CA, CH (European patent), BE (European patent), ER (European patent), GB (European patent), GB (European patent), HU, IT (European patent), LU (European patent), MC (European patent), NO, SE (European patent), NO, SE (European patent), Buffer patent), MC (European patent), ER (European patent), MC (Euro

(54) Title: METHOD AND DEVICE FOR WOUND CLOSURE



(57) Abstrac

A method of treating a wound site wherein a porous, adhesive backed dressing (20) is utilized. A vacuum and/or heat (30) is applied to the wound site through the dressing so as to draw the tissue adjacent the wound site to the dressing so as to minimize trauma to the wound and increase the adherence of the adhesive.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphiets publishing international applications under the PCT.

AT	Austria	FL	I-toland-	м	Mali
AU	Australia	FR	France	MN	Mongoha
BB	Barbados	GA	(midia)	MR	Mauritania
BE	Buleiunt	GB	United Kingdom	MW	Malawi
BF	Burkina baso	GN	Guinca	NI.	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BI	Burin	BU	Humpary	PL	Poland
BR	Brazil	IE	Incland	RO	Romania
CA	Canada	i.c	Italy	RU	Russian Federation
CF	Central African Republic	iP.	Janan	SD	Sudan
CC	Congo	KP	Democratic People's Republic	SE	Sweden
CH	Switzerland	K.	of Korea	SN	Senegal
		KR	Republic of Korea	SU	Soviet Umon
CI	Côte d'Ivoire	LI	Licchtenstein	TD	Chad
CM	Canteroon	LK	Sri Lanka	TG	Togo
CS	Czechoslovakia		Laxemboure	us	United States of America
DE	Ciurmany	LU		05	Dimed Simes s
DK	Denmark	MC	Munaco		

10

15

20

25

1

METHOD AND DEVICE FOR WOUND CLOSURE

Background of the Invention

The present invention related to wound closures and in particular to an improved adhesive wound closure and method for applying the same.

In order to promote the healing of flesh wounds in humans and animals it is desireable to bring the severed surfaces of the wound into close contact with each other. Heretofore adhesive backed tapes such as the so-called "butterfly" bandages have been available as wound closures. Such devices, however, have two major problems associated with their use. The first problem arises from the difficulty in securing the adhesive to the tissue adjacent a wound without aggravating the wound since such dressings require that a pressure be applied to the dressing and hence to the wound. However, this is somewhat self defeating since applying a pressure to the tissue adjacent the wound tends to further separate the severed surfaces rather than draw them together. The second problem arises from the difficulty in obtaining a good adhesive bond between the dressing and the areas surrounding a wound as a result of the moist environment caused by the fluids excreted at the wound site.

15

25

Due to the existence of the above problems suturing has remained the preferred procedure for deep wound treatment notwithstanding the relative ease of using adhesive backed dressings in comparison to suturing.

Summary of the Invention

In view of the above, it is the principle object of the present invention to provide an improved method for the treatment of wounds which enables the use of adhesive backed dressings while overcoming the problems associated with the use of such dressings as discussed above.

A further object is to provide a method of improving the flow characteristics of the adhesive of a dressing so as to minimize the contact force needed to obtain a good bond between the dressing and tissue.

A still further object is to provide a device which may be used in connection with the use of

adhesive backed dressings in the treatment of wounds in accordance with the method of the present invention.

In accordance with the present invention a porous wound dressing provided with an adhesive backing is utilized. The contact side of the dressing is applied to the wound site and is heated

15

20

as a vacuum is applied to the opposite side thereby improving the flow characteristics of the adhesive while drawing the tissue adjacent the wound site into contact with the adhesive. By drawing the tissue into contact with the dressing rather than pressing the dressing onto the wound the tissue adjacent the wound site is brought more closely to its natural state rather than being further separated as would be the case if the dressing were pressed against the wound site. Applying heat to the dressing also tends to drive moisture from the wound site to thereby improve the adherence of the dressing to the tissue at the wound site.

Brief Description of the Drawings

In the accompanying drawings:

Fig. 1 is a simplified diagrammatic view of the effect on tissue adjacent a wound site of applying an adhesive backed dressing in accordance with prior art methodology.

Fig. 2 is a view similar to Fig. 1 illustrating the effect of the method of the present invention on the tissue adjacent a wound site.

Fig. 3 is a simplified view of a device which may be utilized in practicing the method of the present invention. Detailed Description of the Preferred Embodiment

4

In the typical application of a dressing 10 to a wound 12 a downward force is applied to the dressing so as to cause a bonding between the adhesive 14 on the back of the dressing and the tissue 16 adjacent the wound. As shown in Fig. 1 a result of the downward force applied at the wound site is that the tissue adjacent the wound site flexes downwardly and actually widens the wound gap by separating the tissue further.

10

15

In accordance with a first aspect of the present invention a porous adhesive dressing 20 is utilized. The dressing 20 is lightly applied over the wound site and a vacuum is applied to the tissue adjacent the wound gap through the dressing thereby sucking the nonporous tissue adjacent the wound site into close contact and in bonding contact with the adhesive 22 as shown in Fig. 2. As a result of the wound tissue being brought into close contact the healing process is enhanced. To enable the vacuum 20 to be applied through the dressing, the dressing must be porous. Such a porous dressing is disclosed, for example, in U.S. Patent 4,759,354. One such porous dressing is available commercially

15

20

25

from the 3M Corporation under the tradename "TRANSPORE."

As the tissue is sucked up against the dressing the dressing is preferably heated to between 40° C and 80° C. This has two effects: firstly the application of heat to the dressing decreases the viscosity of the adhesive backing and thereby causes the adhesive to flow more uniformly and possibly into regions where it would not otherwise flow to improve the bonding with the tissue adjacent the wound. In addition, heating the dressing tends to dry the wound site and thereby improves the bonding between dressing and the tissue. A further benefit of applying heat is derived from the generally soothing effect that the additional warmth has on a possibly traumatized patient.

In a successful test of the invention a 2.6mm x 4.0mm strip of TRANSPORE tape was applied to a section of skin and subjected to a vacuum which when open had a negative air flow of 1 SCFM (standard cubic foot per minute) and heated through a range of temperatures. Optimum results were obtained when the dressing was heated to a temperature of 55° C. When the heat and vacuum were both applied to the dressing the force of adherence was increased by a factor of approximately 2.4 as compared with no heat

15

or vacuum being applied. When only a vacuum was applied to the dressing the adherence was increased by a factor of approximately 1.6. When only heat was applied the adherence appeared to increase with temperature but leveled off at 80°C with an increased adherence factor of 2.3. At 55°C the adherence increased by a factor of 1.8.

Reference is now made to Fig. 3 wherein a device is depicted with which the present invention may be practiced. The device 30 includes a grip 32 supporting both a suction line 34 and a heating rod 36. The heating rod terminates in a plate 38 through which the suction line 34 passes. The suction line is connected to a vacuum pump 40 through a flow meter 42 and control valve 44. Similarly a control element 46, in the form of a rheostat or the like, is provided to control the temperature attained by the heating element 36.

In use the porous dressing is applied over the
wound and thereafter the device 30 is slightly
passed over the dressing without bearing down on the
dressing. The effect of the vacuum is to draw the
tissue to the adhesive backing of the dressing
rather than the reverse. The applied heat in
addition to assisting in the drying of fluids at the
wound site and improving the adhesive

WO 92/19313 PCT/US92/03498

7

characteristics of the adhesive backing has been reported as having a soothing effect thereby possibly minimizing trauma to the patient.

Thus, in accordance with the above, the aforementioned objectives may effectively be attained.

What is claimed is:

1. A method of treating a wound comprising the steps of:

applying a porous, adhesive backed dressing to 5 a wound site; and

applying a vacuum to said wound site through said porous dressing to draw the tissue adjacent the wound into bonding contact with said adhesive without depressing said dressing into the wound.

- 2. The method in accordance with claim 1 wherein, the step of vacuum application further includes generating said vacuum with a vacuum line which when open has a negative air flow of approximately 1 standard cubic foot per minute or greater.
- 15 3. The method in accordance with claim 1 comprising the further step of applying heat to said dressing to cause said adhesive to flow and to drive moisture from the wound site, and thereby improve bonding contact between said dressing and the tissue without 20 depressing said dressing into the wound.
 - The method in accordance with claim 1 wherein said wound is a flesh wound.
- The method in accordance with claim 3 wherein said step of heat application further includes heating
 said dressing to between 40°C and 80°C.
 - The method in accordance with claim 3 wherein said step of vacuum application is performed simultaneously with said step of heat application.

- 7. The method in accordance with claim 5 wherein said step of vacuum application is performed simultaneously with said step of heat application.
- 8. A method of treating a wound comprising the 5 steps of:

applying a porous, adhesive backed dressing to a wound site; and

applying heat to said dressing to cause said adhesive to flow and to drive moisture from the wound

10 site, and thereby improve bonding contact between said dressing and the tissue without depressing said dressing into the wound.

- 9. The method in accordance with claim 8 wherein said wound is a flesh wound.
- 15 10. The method in accordance with claim 8 wherein said step of heat application further includes heating said dressing to be between 40°C and 80°C.
- A device for use with a porous, adhesive backed dressing for treating a wound site, said device
 including:


vacuum means for applying suction to said wound site through said porous dressing to draw the tissue adjacent the wound site into bonding contact with said adhesive without depressing said dressings into the

- 25 wound; and
 - a grip for supporting said vacuum means.
 - 12. The device in accordance with claim 11 further comprising a plate affixed to said grip means, and said vacuum means passing through said plate.

- The device in accordance with claim 12 further comprising means for heating said plate so that heat is applied to the dressing to cause said adhesive to flow and to drive moisture from the wound site, and thereby improve bonding contact between said dressing and the tissue without depressing said dressing into the wound.
 - 14. A device for use with an adhesive backed porous dressing for treating a wound site, said device including:

10 a grip;

a plate affixed to said grip; and
means for heating said plate so that heat is
applied to the dressing to cause said adhesive to flow
and to drive moisture from the wound site, and thereby
improve bonding contact between said dressing and the
tissue.

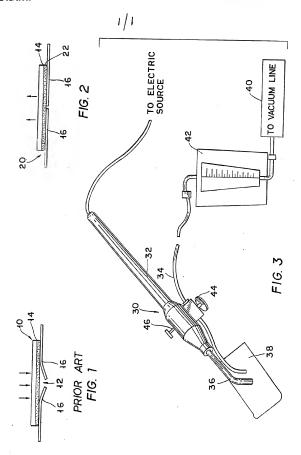

INTERNATIONAL SEARCH REPORT

International application No. PCT/US92/03498

	SSIFICATION OF SUBJECT MATTER :A61M 35/00							
According to International Patent Classification (IPC) or to both national classification and IPC								
B. FIELDS SEARCHED								
Minimum documentation searched (classification system followed by classification symbols)								
U.S. : Please See Extra Sheet.								
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched								
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)								
C. DOCUMENTS CONSIDERED TO BE RELEVANT								
Category*	Citation of document, with indication, where a	ppropriate, of the relevant passages	Relevant to claim No.					
A	US,A, 4,969,880 (ZAMIEROWSKI) 13 November	1-14						
A	US,A, 4,540,412 (VANOVERLOOP) 10 Septemb	1-14						
□ Fuel	er documents are listed in the continuation of Box C	See patent family annex.						
"A" doc	cial categories of cited documents: sument defining the general state of the art which is not considered so part of particular relevance	"T" later document published after the inte date and not in conflict with the applica principle or theory underlying the inventor	ation but cited to understand the					
	lier document published on or after the international filing date	*X* document of particular relevance; the considered nevel or cannot be conside	e claimed invention cannot be					
"L" doc	ument which may throw doubts on priority claim(s) or which is d to establish the publication date of another citation or other cial reason (as specified)	"Y" document of particular relevance; the considered to involve an inventive	•					
	ument referring to an oral disclosure, use, exhibition or other	considered to involve an inventive combined with one or more other such being obvious to a person skilled in th	h documents, such combination					
the	ument published prior to the international filing date but later than priority date claimed	"&" document member of the same patent						
Date of the	actual completion of the international search	Date of mailing of the international sea	rch report					
15 JULY	1992	28 SEP 199 2						
Name and mailing address of the ISA/ Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231		Authorized officely and for figure 1. M. REICHLE						
Fassimile Me		Tuenhone No. (703) 308-0858	/					

INTERNATIONAL SEARCH REPORT

International application No. PCT/US92/03498

B. FIELDS SEARCHED Minimum documentation searched Classification System: U.S.

604/290 604: 289-291, 304-305, 307, 313, 315, 316, 902 128: 89.1, 155, 399, 400, 82, 82.1, 851, 390 606: 213, 215, 216, 27; 138, 148, 149

Form PCT/ISA/210 (extra sheet)(July 1992)*